


MODEL 209C 209CH

Super symmetric Two-Post Lift

The 209CH share the same features as 209C but with higher columns.



Super Symmetric Arms





The 209C 209CH features our innovative super symmetric technology providing technicians the versatility to lift vehicles both symmetrically and asymmetrically upon demand.

With standard features that include adjustable height, direct drive, powder coat finish, stackable rubber pads and many other appealing features, the 209C 209CH accommodates the most demanding lift requirements.

FEATURES

- Supersymmetric arms increase overall arm sweep and minimum arm reach to precisely lift vehicles:
 - » Asymmetric or Symmetric lifting in the same service bay
 - » Visually marked pick-up points on the vehicle.
 - » Uni-body design vehicles
 - » Wider and low profile vehicles
 - » Both short and long wheel bases
- Dual hydraulic direct-driven cylinders made on ANSI standard
- 3/8" aircraft quality cable is used for synchronization
- Single-point safety release, allow technician to disengage both column simultaneously
- Self-lubricating UHMW Polyethylene sliders and bronze bush
- Clear-floor design, provide unobstructed floor use
- Overhead safety shut-off device prevents vehicle damage
- Stackable rubber pads and 1.5", 3", 6" adapters as standard supply
- Standard adjustable heights accommodates varying ceiling heights
- Standard door guards
- Standard toe guards on lifting arms
- Optional adjustable widths accommodate varying service bay sizes
- Hydraulic power unit

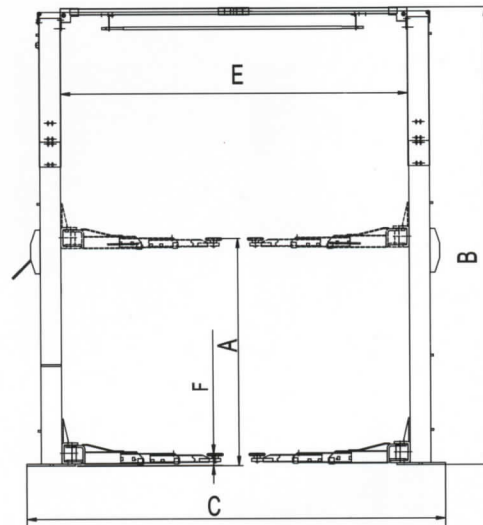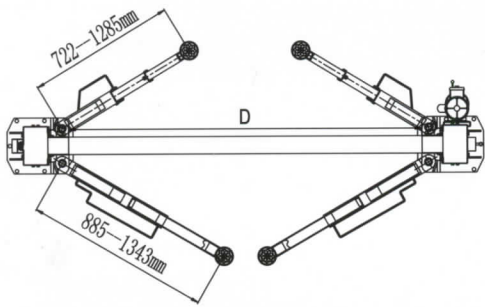

SPECIFICATIONS

| Model | Style | Lifting Capacity | Lifting Time | A | B | C | D | E | F | Gross Weight | Motor |
|-------|--------------------------|-------------------|--------------|---------------------------------|-------------------------------------|----------------|----------------------|-----------------------|--------------------|-------------------|-------------|
| | | | | Lifting Height | Overall Height | Overall Width | Drive-Thru Clearance | Width Between Columns | Minimum Pad Height | | |
| 209C | Clearfloor Direct-driven | 4.0T (9,000 lbs.) | 52 Seconds | 1815-2085mm (71 1/2" - 82 1/8") | 3621 / 3821mm (142 1/2" / 150 1/2") | 3428 mm (135") | 2528 mm (99 1/2") | 2850 mm (112 1/4") | 90 mm (3 1/2") | 640kg (1,410 lbs) | 2.0 / 3.0HP |
| 209CH | Clearfloor Direct-driven | 4.0T (9,000 lbs.) | 52 Seconds | 1815-2085mm (71 1/2" - 82 1/8") | 4231 / 4431mm (166 1/2" / 174 1/2") | 3428 mm (135") | 2528 mm (99 1/2") | 2850 mm (112 1/4") | 90 mm (3 1/2") | 670kg (1,476 lbs) | 2.0 / 3.0HP |

MODEL 209C 209CH

Clearfloor Direct-driven Two-post Lift

ADVANCE LINE OF TWO POST LIFTS

Model 209C, 209CH is our another one of advance line two post lift ... Clear floor, more flexible with width and high adjustment, advance features.



- ▶ **Single-Point Safety Release**
The Single-point safety release makes it easy for the operator to unlock both columns locks from one column, and more reliable !



- ▶ **Hydraulic Direct-driven Cylinders**
The hydraulic direct-driven cylinders feature more efficient, more longevity, more reliable and almost no service needed.



- ▶ **Super symmetric arms** allow you to load vehicles in an asymmetric or symmetric configuration. Automatic arms restraints, Protect rubber door guards, Self-lubricated sliders... make PEAK Advance line of two post lifts work excellent !



- ▶ **The stackable rubber pads package** with 1.5", 3", 6" extension adapters



- ▶ **EXCLUSIVE FEATURE !**
Optional Width Extension Kits
With these kits the width between posts is adjusted from 2850mm(112-1/4") to 3000mm (118-1/8")